

Dati tecnici

Lubrificazione consigliata:
Olio per utensili pneumatici

Accessori:
chiave esagonale 4-5 mm

Applicazioni:
Sostegni, fabbricazione pallet/casse, travature, coperture, strutture, sotto pavimento.

Sistema di funzionamento:
Azionamento a contatto

Caricamento

- 1.Sbloccare la chiusura per aprire porta e caricatore.
- 2.Regolare il livello del caricatore in modo che i chiodi siano allineati con la linea guida.
- 3.Caricare i chiodi dall’alto del caricatore dentro il sistema di alimentazione.
- 4.Chiudere il caricatore e assicurarsi che il chiavistello sia chiuso correttamente.

Technical data

Recommended lubrications:
Pneumatic tool oil

Accessories:
4 and 5 mm hex. bar wrenches

Applications & suitability:
Cedar & derwood siding, sub-flooring, boxes, crates and other wooden assemblies.


Actuating system:
Contact actuation

Filling the magazine

- 1. Release latch to open the door and magazine.
- 2. Adjust the level of the magazine base so that the nails will feed in line with guides.
- 3. Load nails onto pivot in the magazine and full forward so that the nails are inserted into the feeder mechanism.
- 4. On closing the magazine ensure the latch is closed properly.



195MCN2565_CN2565_130911 IV



Manuale d’uso, manutezione e parti di ricambio Parte 2

Use, maintenance and spare parts manual Part.2

CN25.65

cod. 195MCN2565


Indice di modifica
Upgrade number

A1

Misure impiegabili mm (inch) Usable lenghts mm (inch)	38÷65 (1-1/2”÷2-9/16”)
Capacità caricatore n° punti Magazine capacity No. of fasteners	300÷350
Pressione d’esercizio bar (psi) Working pressure bar (psi)	5÷8 (70÷115)
Consumo aria litri/colpo a 7 bar Air consumption litres/shot at 7 bar	0,9
Peso kg Weight kg	2,75
Dimensioni (AxBxH) mm Dimensions mm	300x130x312
Pressione sonora Max A-Weighted surface impulse sound pressure level	85,3 dBA
Potenza sonora emessa Max A-Weighted impulse sound power level	87,5 dBA
Vibrazione Vibration	3,83 m/s²

omer s.p.a.
Via Foresto, 42 - 31058 SUSEGANA (TV) ITALY
Tel. 0438 455 318 Fax 0438 455 530
e-mail: omer@omer.it www.omer.it

Tipo di punto
Type of fastener

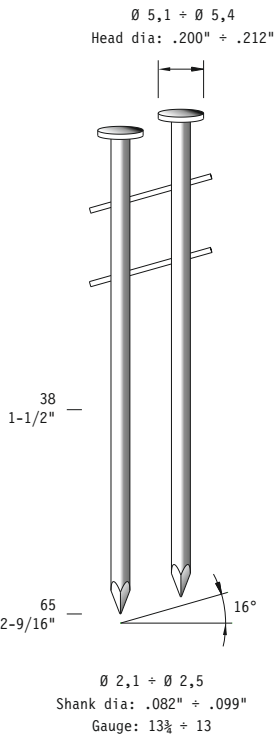

Ref. No.	Part No.	Description
----------	----------	-------------

101	2MCN3390-A101	Hex. Soc. Hd. Bolt
102	2MCN3383-A102	Washer
103	2MCN3165-A105	Rubber Pad
104	2MCN3383-A104	Deflector
105	2MCN3165-A104	Muffler
106	2MCN3383-A105	O-Ring
107	2MCN2970-A104	Hex. Soc. Hd. Screw
108	2MCN2565-A108	Hex. Soc. Hd. Bolt
109	2MCN2357-A109	Guide Cover
110	2MCN2565-A110	Cap
111	2MCN2357-A111	Washer Seal
112	2MCN2357-A112	Seal
113	2MM365-A110	Compression Spring
114	2MCN2357-A114	O-Ring
115	2MCN2970-A109	O-Ring
116	2MCN2357-A116	Washer
117	2MM365-A113	Hd. Valve Piston
118	2MCN2565-A118	Cylinder Cap Seal
119	2MM365-A118	O-Ring
120	2MCN2565-A120	Driver Unit
121	2MM365-A120	Collar
122	2MCN2565-A122	Cylinder
123	2MCN2357-A123	O-Ring
124	2MCN2565-A124	Cylinder Ring
125	2MCN2565-A125	Cylinder Spacer
126	2MCN2357-A126	O-Ring
127	2MCN2565-A127	Bumper
201	2MCN2970-A201	O-Ring
202	2MCN2970-A202	Plunger Cap
203	2MCN2970-A203	O-Ring
204	2MCN3165-A205	O-Ring
205	2MCN2970-A205	Valve Plunger
206	2MCN3165-A206	O-Ring
207	2MCN2970-A207	Spring
208	2MCN2970-A208	O-Ring
209	2MCN2357-A209	Plunger
210	2MCN2970-A210	Trigger Valve Head
211	2MCN2970-A211	Pin
212	2MCN2970-A212	Cover Plunger
213	2MCN2970-A213	O-Ring
214	2MCN2970-A214	O-Ring
215	2MCN2970-A215	Spring Pin
216	2MCN2565-A216	Secondary Trigger
217	2MCN2565-A217	Trigger
218	2MCN2565-A218	Spiral Pins
219	2MCN2357-A219	Spiral Pins
301	2MCN2357-A301	Gun Body Unit
302	2MCN2357-A302	O-Ring
303	2MCN2357-A303	End Cap
304	2MCN3165-A304	Dusty Cover
305	2MCN3165-A305	Air Plug
401	2MCN2357-A401	O-Ring
402	2MCN2970-A402	O-Ring
403	2MCN2565-A403	Nose Piece
404	2MCN2565-A404	Hex. Soc. Hd. Bolt
405	2MCN3390-A409	O-Ring
406	2MCN2565-A406	Feed Piston
407	2MCN2970-A407	O-Ring
408	2MCN2357-A408	Pusher Spring B
409	2MCN2970-A408	Feed Bumper
410	2MCN2565-A410	Pusher Spring A
411	2MCN2565-A411	Rod
412	2MCN2357-A412	Feed Piston Cap
413	2MCN2970-A411	C-Ring
414	2MCN2970-A413	Door Latch
415	2MCN3383-A415	Latch Spring
416	2MCN2565-A416	Door
417	2MCN2970-A416	Pu Retainer
418	2MCN3165-A211	Spring Pin
419	2MCN2970-A418	Stopper Finger Spring
420	2MCN2357-A420	Nail Stop
421	2MCN2357-A421	Pin-Nail Stop
422	2MCN2565-A422	Muzzle Protector
423	2MCN2970-A422	Dust Shield Plug
424	2MCN2565-A424	Safety
425	2MCN3390-A505	Safety Spring

426	2MCN2565-A426	Door Shaft Pin
427	2MCN2565-A427	Magazine Case
428	2MCN2565-A428	Adjust Post
429	2MCN2565-A429	S-Ring
430	2MCN2970-A429	Spring Base
431	2MCN2565-A431	Spacer
432	2MCN2970-A432	Spacer
433	2MCN2970-A433	Pull Spring
434	2MCN2565-A434	Magazine Cover
435	2MCN2970-A435	Pin Feed Piston
436	2MCN2565-A436	Feed Finger
437	2MCN2970-A437	Feed Finger Spring
438	2MCN2357-A438	Hex. Soc. Hd. Bolt
439	2MCN2357-A439	Protector Washer
440	2MSN2213-A409	Flat Washer
441	2MCN2357-A441	Spring Cover
442	2MCN2357-A442	Magazine Shaft Pin
443	2MCN2970-A442	Bolt Cap
444	2MCN2565-A444	Safety Guide

