


Caricamento - Loading



Manuale d'uso, manutenzione e parti di ricambio
Use, maintenance and spare parts manual
Gebrauchsanweisung, Instandhaltungsrichtlinien und Ersatzteile
Manuel d'utilisation, entretien et pièces de rechange
Manual de uso, mantenimiento y repuestos
Εγχειρίδιο χρήσης, συντήρησης και ανταλλακτικών
Manual de utilização, manutenção e partes sobresselentes
Handleiding voor gebruik, onderhoud en wisselstukken
Brugsanvisning, vedligeholdelse og reservedelsliste

Parte 2
Part 2
Teil 2
Partie 2
Part 2
2° Μέρος
Parte 2
Deel 2
Del 2

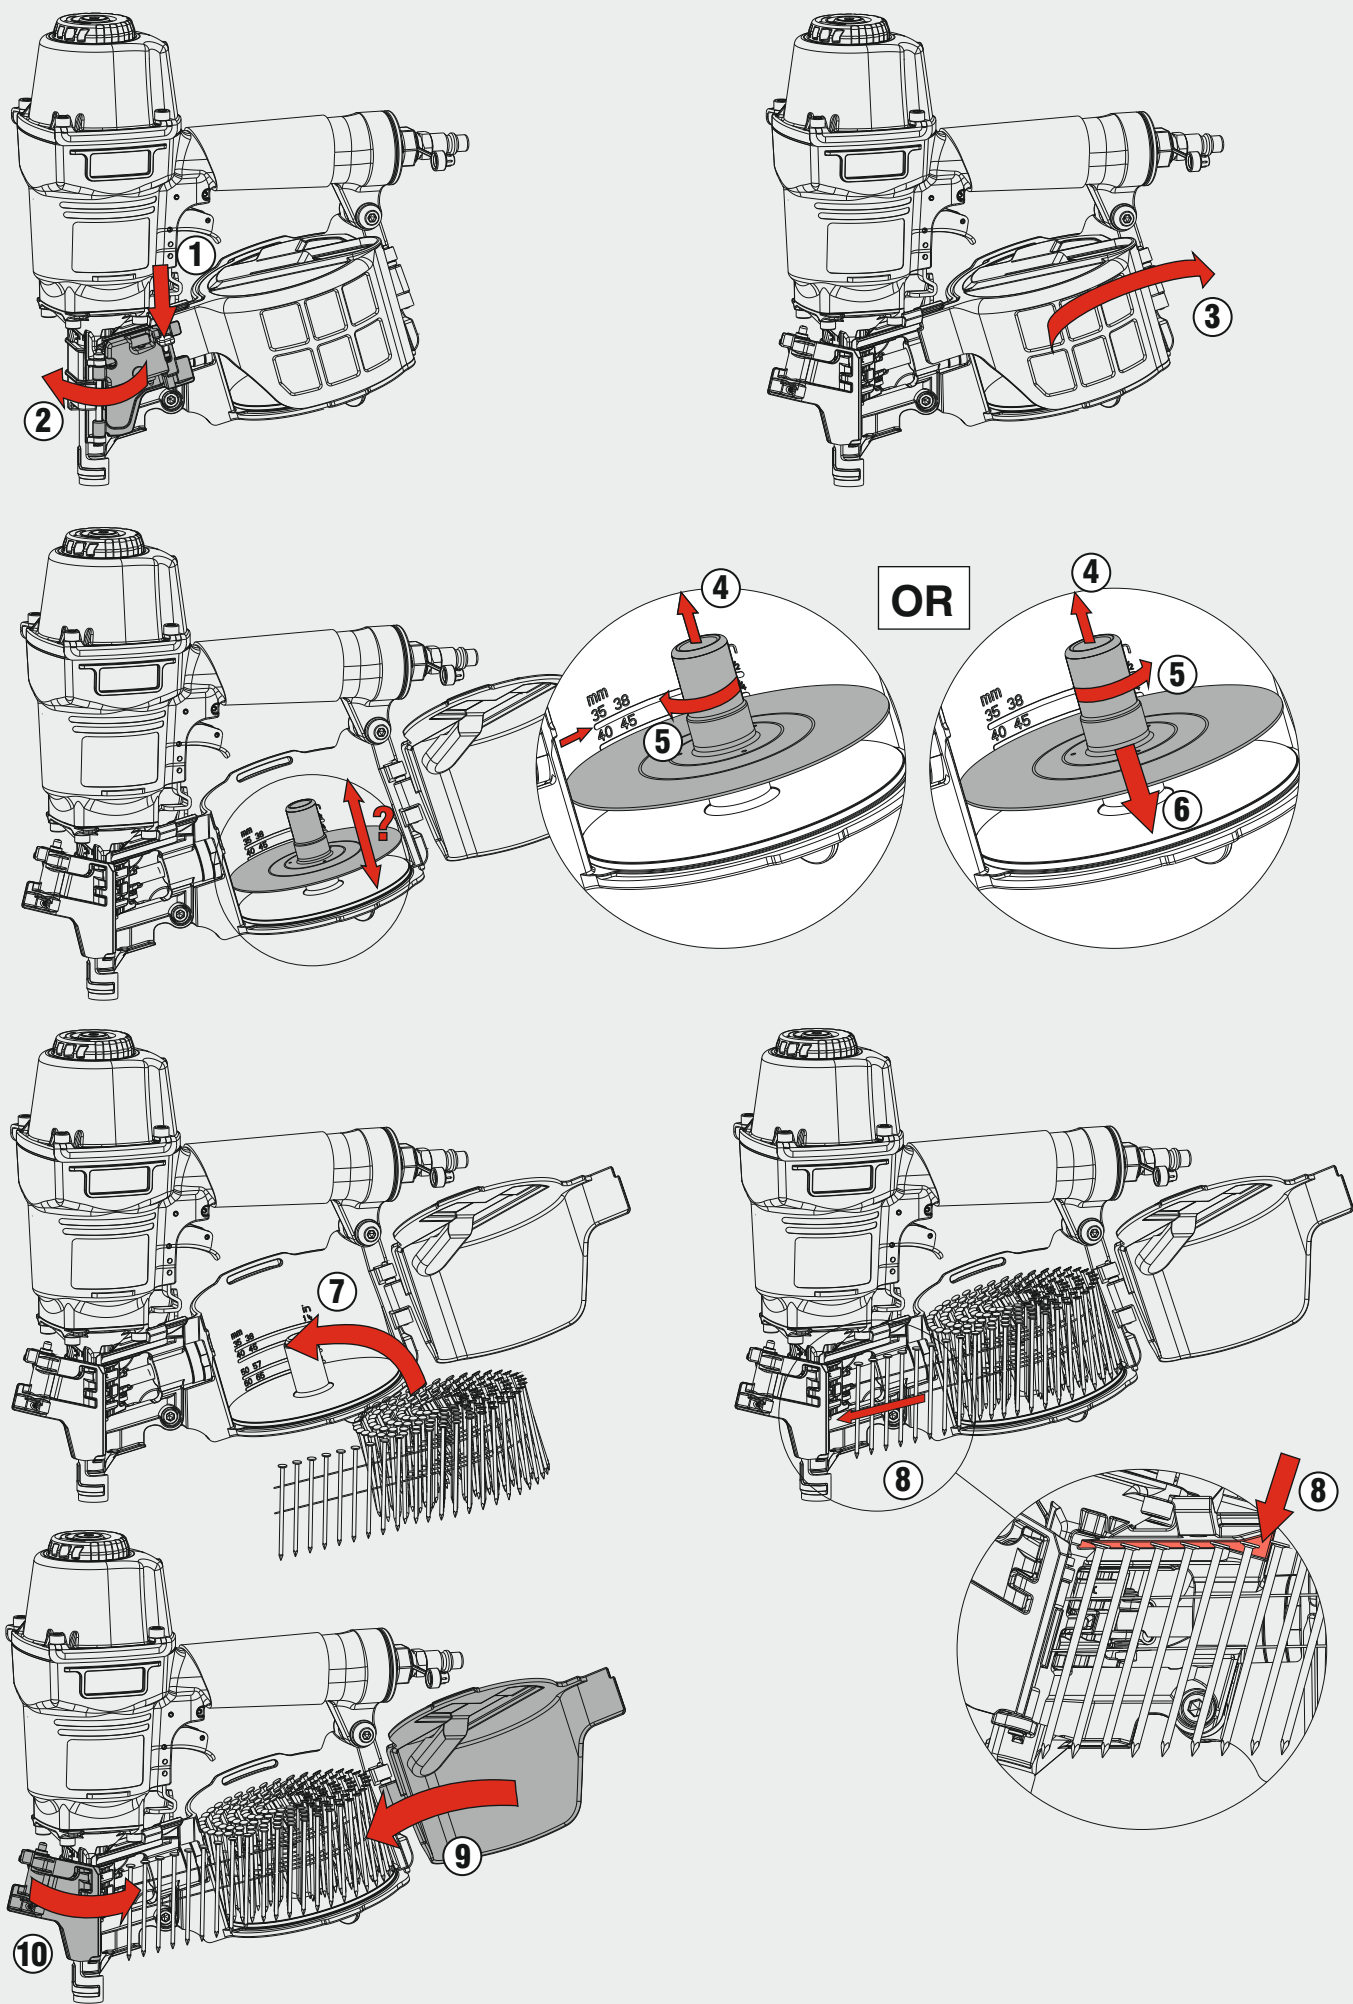

CN33.90

cod. 195MCN3390A3

195MCN3390A3_CN3390_220120 IV




Warning: Please read the instructions and warnings for this tool carefully before use. Failure to do so could lead to serious injury.



Dati tecnici	Données techniques	Dados técnicos
Technical data	Datos técnicos	Technische gegevens
Technische Daten	Τεχνικά χαρακτηριστικά	Teknische data


Misure impiegabili mm Usable lengths mm Gebrauchliche Längen mm	Mesures utilisables mm Medidas que se pueden emplear mm Διαστάσεις σε μμ	Medidas que se podem utilizar mm Te gebruiken engtes in mm Brugbare lengdes in mm	45÷90
Capacità caricatore n° punti Magazine capacity No. of fasteners Magazinkapazität Nägel	Capacité chargeur n° de points Capacidad cargador n° puntos Δυνατότητα γεμιστέρα, σπινδελτερος	Capacidade carregador n° pontos Capaciteit magazijn in aantal spijkers Kapacitet af magasin antal klemme	200÷300
Pressione d'esercizio Working pressure Betriebsdruck	Pression de fonctionnement Presión de trabajo Πίεση λειτουργίας ατμ.	Pressao de trabalho Werkdruk Arbejds tryk bar	5÷8 bar 70÷115 psi
Consumo aria litri/colpo Air consumption litres/shot Luftverbrauch Liter/Schlag	Consommation air litre/coup Consumo aire-litros/golpe Καταναλοση αερα λ/ξτωπημα	Consumo ar litro/golpe Luchtverbruik liter/schot Luftforbrug liter/skud	2,87
Peso kg Weight kg Gewicht kg	Poids kg Peso kg Βαρος κγ	Peso kg Gewicht in kg Vægt kg	3,50
Dimensioni (AxBxH) mm Dimensions mm Große mm	Dimension mm Dimensiones mm Δυνατότητα γεμιστέρα , σπινδελτερος	Dimencoes mm Afmetingen in mm Dimensioner mm	386x149x356
EN 12549 :1999 ISO 11201 :1995			
Pressione sonora in pos. operatore Sound pressure at the workstation Lärmintensität am Arbeitsplatz	Pression acoustique près de l'opérateur Presión sonora en posición encargado Ακουστική πίεση στη θέση χειριστού	Intensidade sonora perto do operador Geluidssterkte op de werkplek Lydstyrke på operatorposten	L_{pA,1s} (Rif. 20μPa) 88 dB(A)
EN 12549 :1999 ISO 3744 :1994			
Potenza sonora emessa Emitted sound power Ausgestrahlte Lärmintensität	Puissance acoustique émise Potencia sonora emitida Ακουστική ισχυ	Potência sonora emitida Uitgestraalde geluidssterkte Udsendt lydstyrke	L_{WA,1s} (Rif. 1pW) 101 dB(A)
EN 28662 :1992 ISO 5349 :1986 ISO 8662 -11			
Valore medio ponderato di vibrazione sull'impugnatura max.33 colpi Weighted mean value of vibration on the grip max.33 shots Mitteler Vibrationswert, am Griff gemessen max.33 Schläge	Valeur moyenne pondérée de vibration mesurée sur la poignée max.33 coups Valor medio ponderado de vibracion medida en la empuñadura max.33 golp Μεσος ορος μετρησης κραδασμων στη χειρολαβη μαξ.33 ξτωπημα	Valor medio ponderado de vibracao medida no punho max.33 golpes Gewogen gemiddelde vibratiewaarde max.33 schot Middelvaerdi af vibrationer pa handtaget max.33 skud	3,75 m/s²

CNW28
CNW31

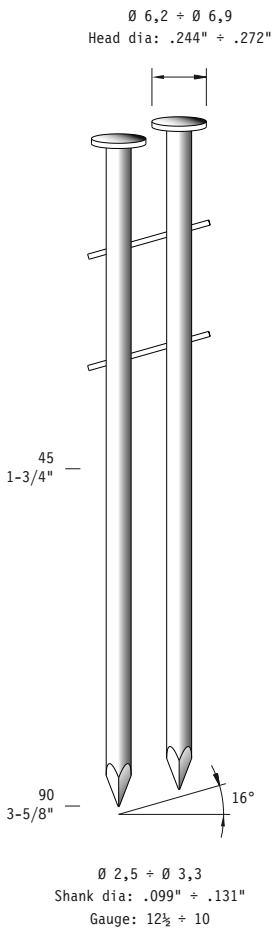




Ref. No.	Part No.	Description
----------	----------	-------------

101	2MCN3390-A101	Counter Sunk Screw
102	2MCN3390-A102	Deflector Pad
103	2MCN3390-A103	Deflector
104	2MCN3390-A104	Pubber Pad
105	2MCN2970-A103	Grommet
106	2MCN3390-A106	Bolt Assy
107	2MCN3390-A107	Cap
108	2MCN2970-A104	Hex. Soc. Hd. Screw
109	2MCN3390-A109	Positioning Axis
110	2MCN3165-A207	Spring
111	2MCN3390-A111	Hex. Soc. Hd. Screw
112	2MCN3390-A112	Compression Spring
113	2MCN3390-A113	Hd.Valve Piston
114	2MCN3390-A114	O-Ring
115	2MCN3390-A115	O-Ring
116	2MCN3390-A116	O-Ring
117	2MCN3390-A117	Valve
118	2MCN3390-A118	Collar
119	2MCN3390-A119	Seal
120	2MCN3390-A120	Half Round Hd.Hex.Bolt
121	2MCN3390-A121	Cylinder Cap Seal
124	2MCN3390-A124	Press Ring
125	2MCN3390-A125	Cylinder
126	2MCN3390-A126	O-Ring
127	2MCN3390-A127	Cylinder Ring
128	2MSN2210-A123	Cylinder Spacer
129	2MCN3390-A129	O-Ring
130	2MCN3390-A130	Bumper
131	2MCN3390-A131	Press Ring
132	2MCN3390-A132	O-Ring
133	2MCN3390-A133	Guide Cover
134	2MCN3390-A134	Bolt Assy
200	2MCN3165-A200	Trigger Valve Unit
201	2MCN3165-A201	O-Ring
202	2MCN3165-A202	O-Ring
203	2MCN3165-A203	Plunger Cap
204	2MCN3165-A204	Valve Plunger
205	2MCN3165-A205	O-Ring
206	2MCN3165-A206	O-Ring
208	2MCN2550-A208	Plunger
209	2MCN3165-A209	O-Ring
210	2MCN3165-A210	Trigger Valve Head
211	2MCN3165-A211	Spring Pin
212	2MCN3165-A213	Spring Pin
213	2MCN3390-A213	Trigger Unit
216	2MCN3390-A216	Trigger Pivot Pin
217	2MCN3165-A416	Urethane Retainer
301	2MCN3390-A301	Gun Body Unit
302	2MCN3390-A302	O-Ring
303	2MSN2210-A303	End Cap
304	2MCN3165-A304	Dusty Cover
305	2MCN3165-A305	Air Plug
306	2MCN3390-A306	Filter
401	2MCN3390-A401	O-Ring
402	2MCN3390-A402	O-Ring
404	2MCN3390-A404	Bolt Assy
405	2MCN3165-A414	Pu Retainer
406	2MCN3390-A406	Feed Finger
407	2MCN3390-A407	Feed Finger Spring
408	2MCN3390-A408	Pin Feed Piston
409	2MCN3390-A409	O-Ring
410	2MCN3390-A410	Feed Piston
411	2MCN3390-A411	O-Ring
412	2MCN3390-A412	Feed Piston Spring
413	2MCN3390-A413	Feed Bumper
414	2MCN3390-A414	Feed Piston Cap
415	2MCN3390-A415	C-Ring
417	2MCN3390-A417	Stopper Finger Sprin
419	2MCN3390-A419	Spiral Pins
423	2MCN3390-A423	Safety Guide
424	2MCN3390-A424	Safety Spring
427	2MCN2970-A440	Flat Washer
430	2MCN3165-A444	Spring Base A
431	2MCN3390-A431	Spacer
432	2MCN3390-A432	Adjust Post
433	2MCN3390-A433	Magazine Case
434	2MCN3390-A434	S-Ring
435	2MCN3390-A435	Pull Spring
436	2MCN3165-A448	Spring Base
437	2MCN3390-A437	Magazine Cover
438	2MCN3390-A438	Pin
439	2MCN3390-A439	Latch Spring Bushing
440	2MCN3390-A440	Hex. Soc. Hd. Bolt
441	2MCN3390-A441	Safety Cover
442	2MCN3165-A456	Fixed Pin
443	2MCN2550-A456	Fixed Ring
444	2MCN3390-A444	Fixed Ring
445	2MCN3390-A445	Muzzle Protector
446	2MCN2970-A215	Spring Pin

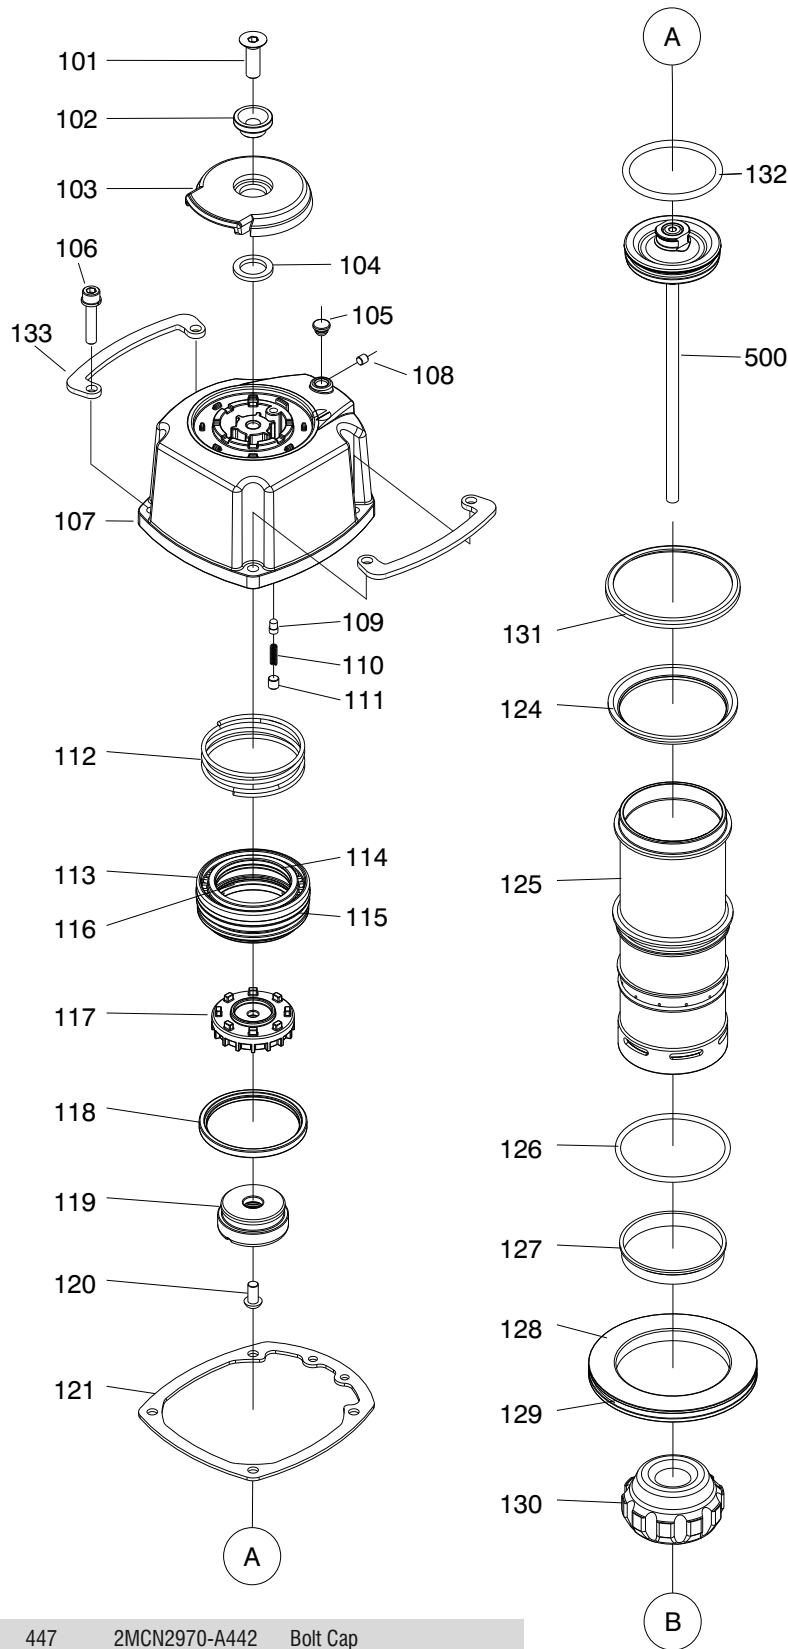


447	2MCN2970-A442	Bolt Cap
500	2MCN3390-A500	Driver Unit
501	2MCN3390-A501	Nose Piece
502	2MCN2970-A416	Pu Retainer
503	2MCN3390-A503	Door Shaft Pin
504	2MCN3390-A504	Nail Stop
505	2MCN3390-A505	Safety Spring
506	2MCN2970-A413	Door Latch
507	2MCN3383-A415	Latch Spring
508	2MCN3390-A508	Door
509	2MCN3390-A509	Safety
600	2MCN2550-K215	Seq. / Cont. trigger KIT

Dotazioni - Equipment

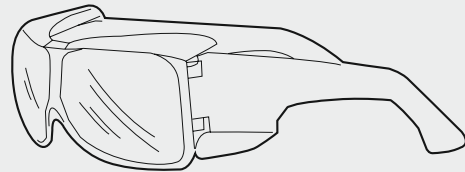

Accessori a richiesta - Upon request accessories



Supporto bilanciere
Tool hanger

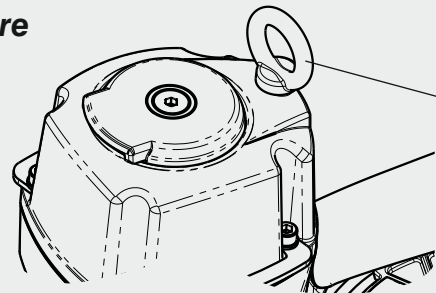

Note - Notes

Parti di ricambio - Spare parts - Ersatzteile - Pièces de rechange - Piezas de repuesto
Ανταλλακτικά - Partes sobresselentes - Wisselstukken - Reservedele

Disinceppamento - Jam clearing

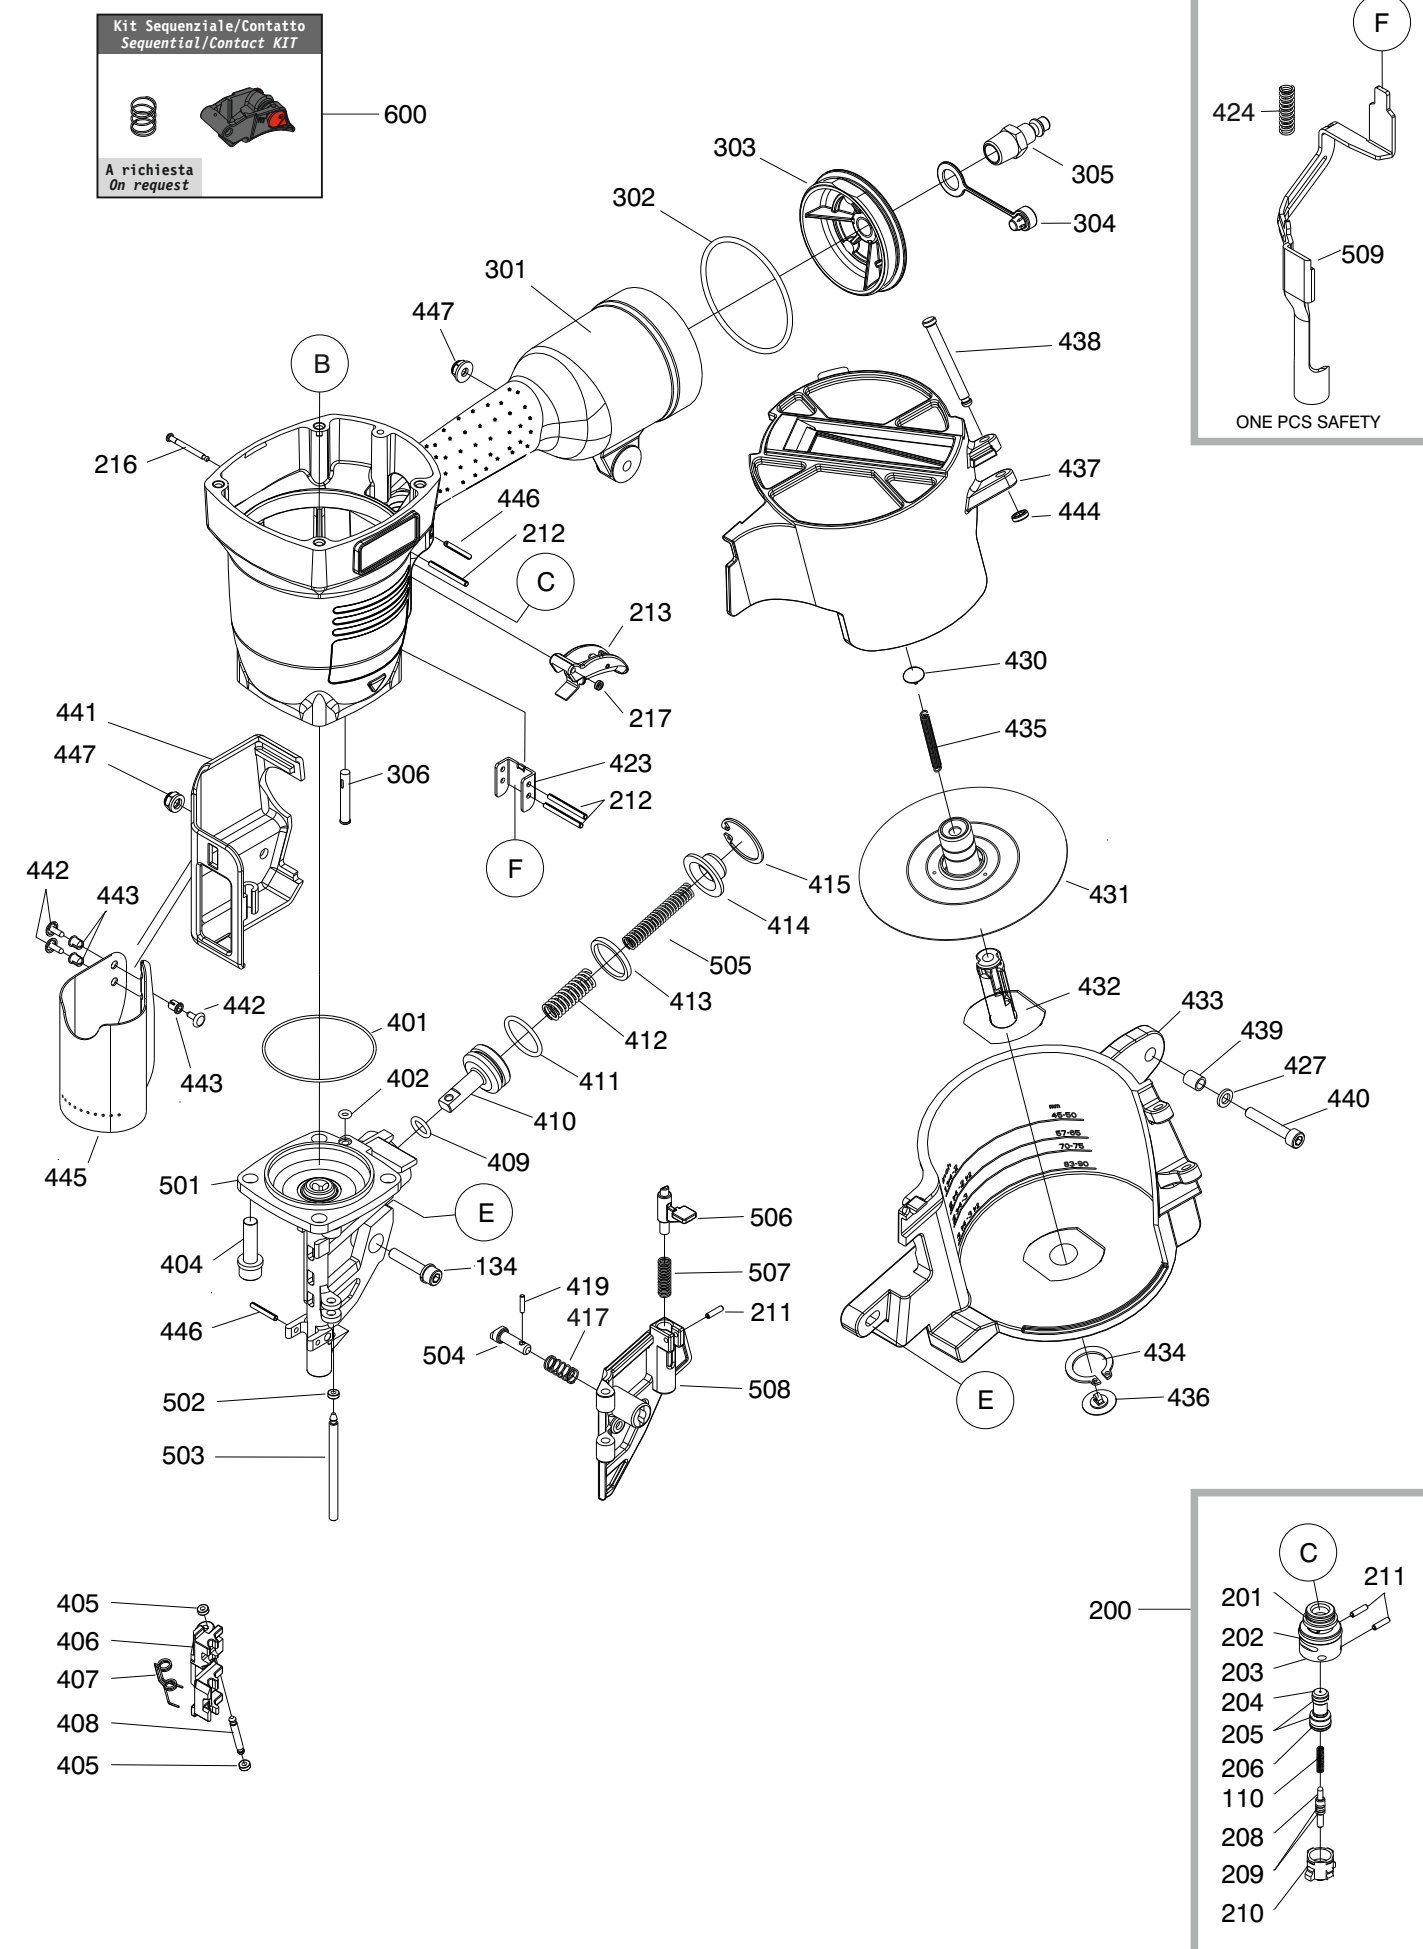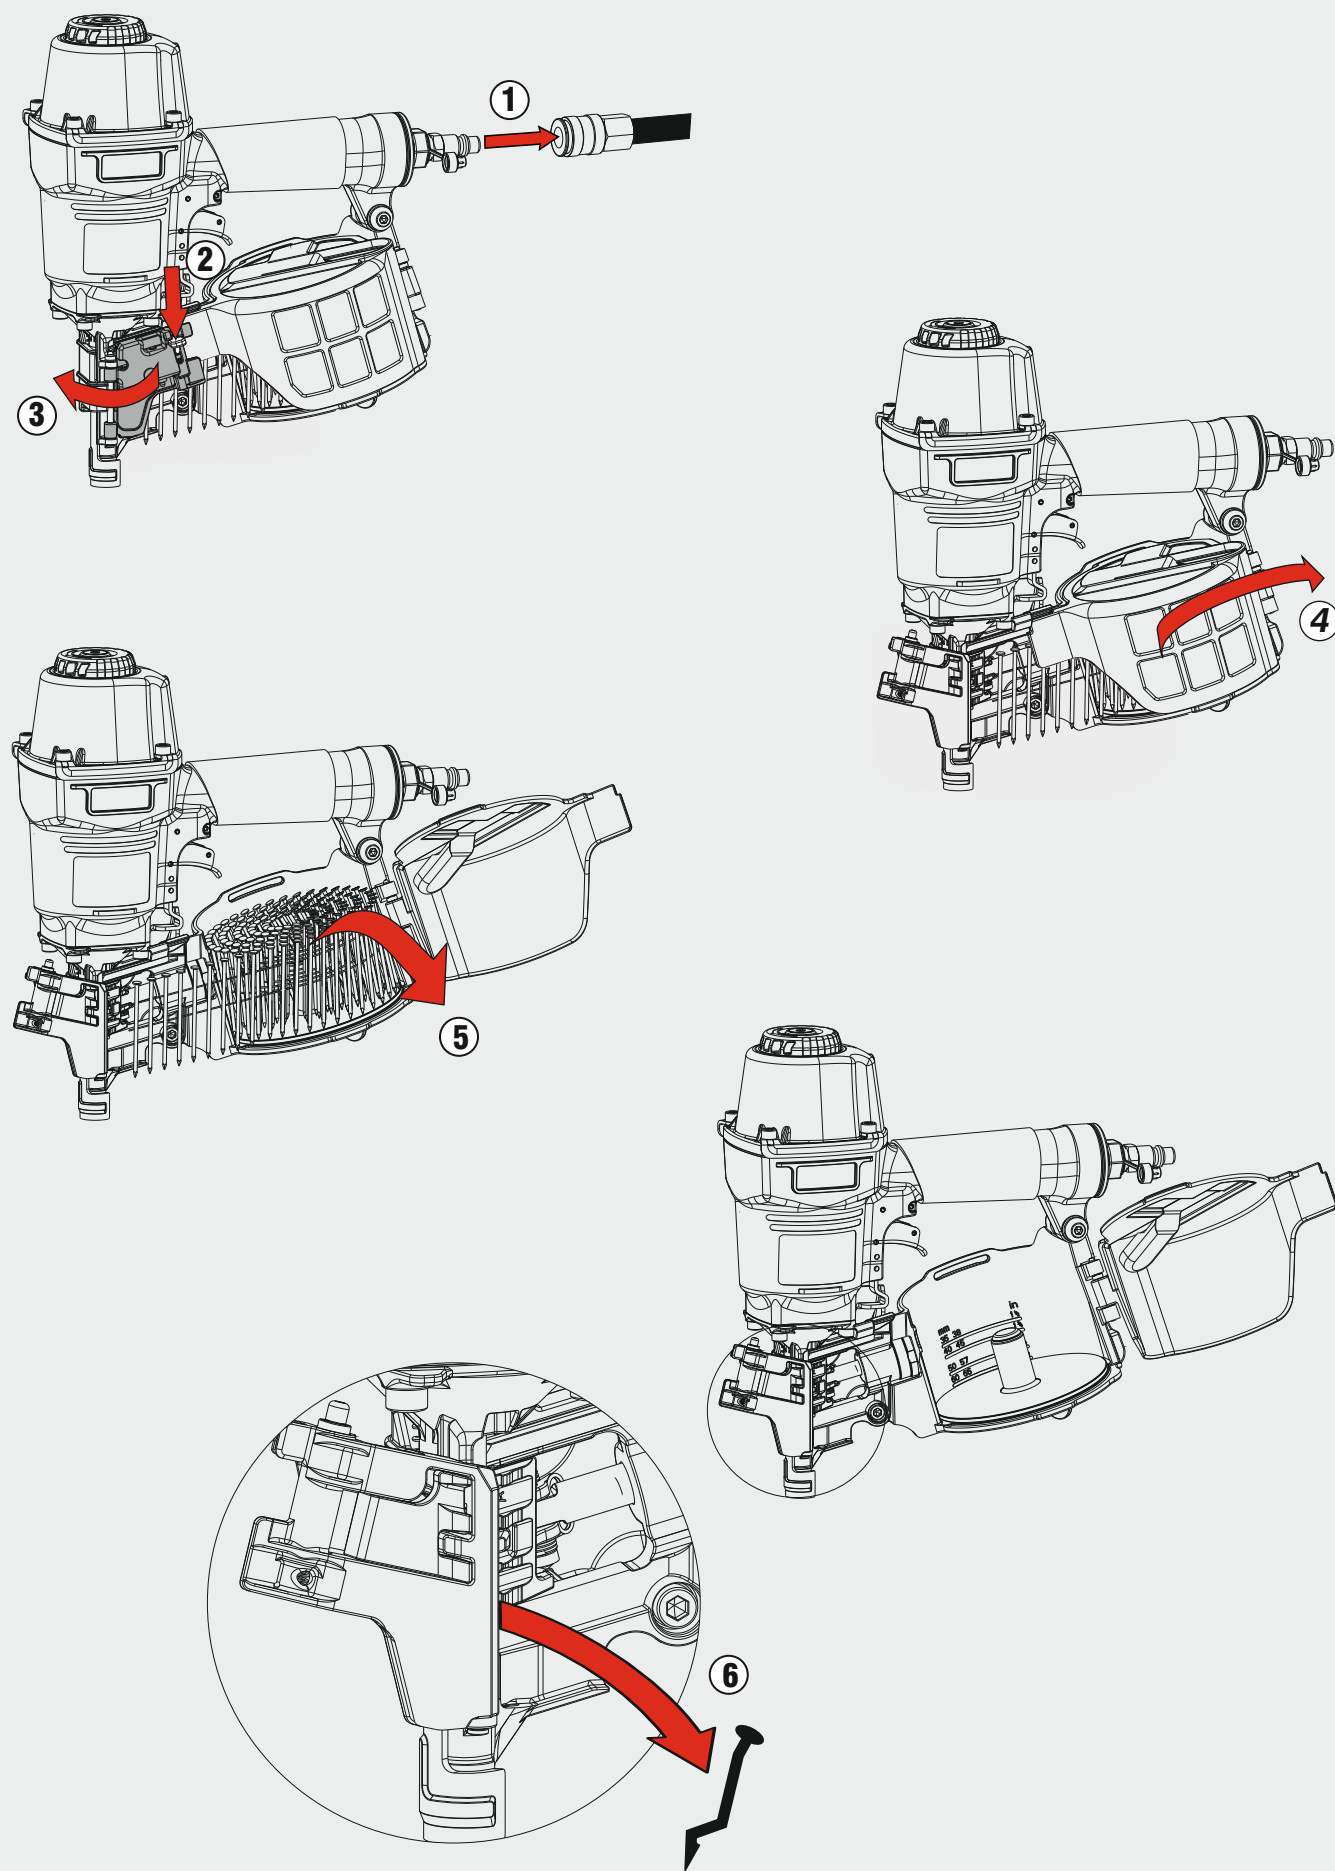

CN33.90

cod. 195MCN3390A3

Indice di modifica
Upgrade number


A3

Azionamento - Actuation




Di serie / Standard

Azionamento a contatto
Contact actuation

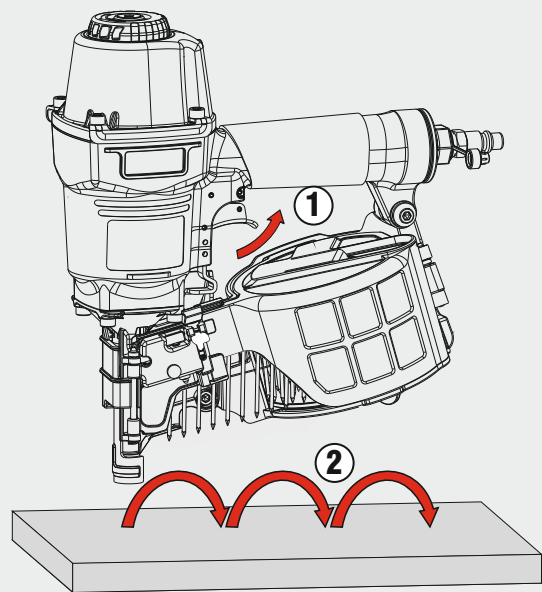

Oppure - Or


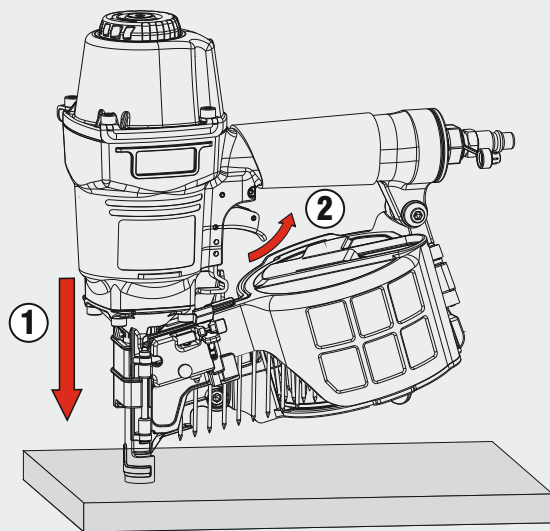


Azionamento - Actuation




A richiesta / On request

Azionamento a contatto
Contact actuation

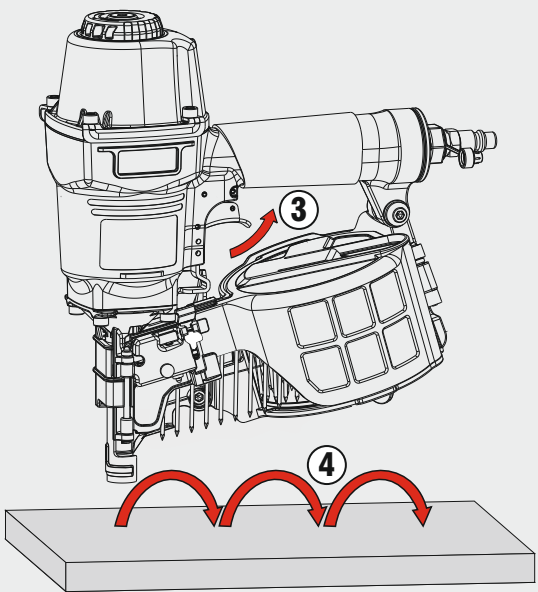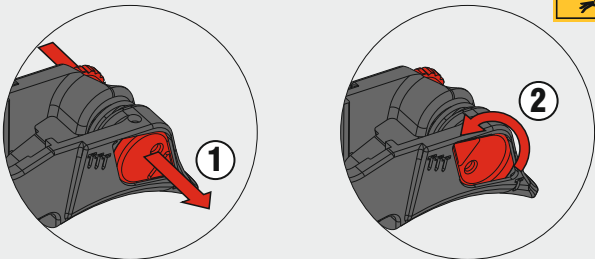

Oppure - Or

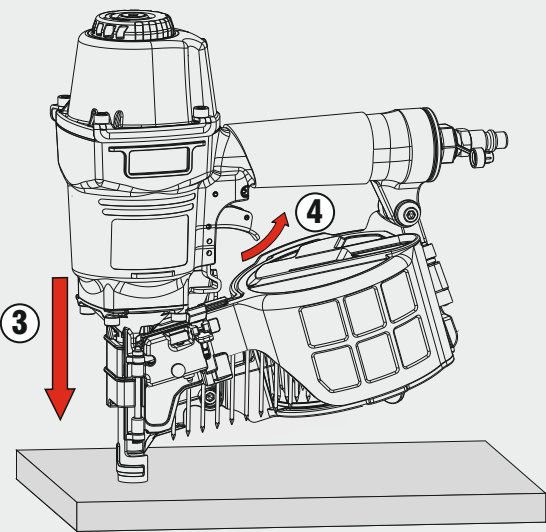

Azionamento sequenziale singolo
Single sequential actuation

